

FC/FD SERIES





MINI FILTERS AND DESICCANT DRYERS

REPLACEMENT KIT FOR FC-1/2 & FC-1




Risk of injury. Release all air pressure from system before servicing.

>> HOW TO INSTALL A NEW REPLACEMENT KIT

-  Press on the latch pin and turn the bowl 1/8 left or right.
-  Remove the old coalescer filter and install the new one.
-  Put the bowl back and make sure that the latch pin is in the center of the head unit.
-  Re-open air supply SLOWLY. Check for air leakage. If leakage occurs, shut off air supply, relieve pressure from unit by manually activating the drain cock on the bottom of the FC, and make sure that the bowl is installed properly.

>> INSTALLATION

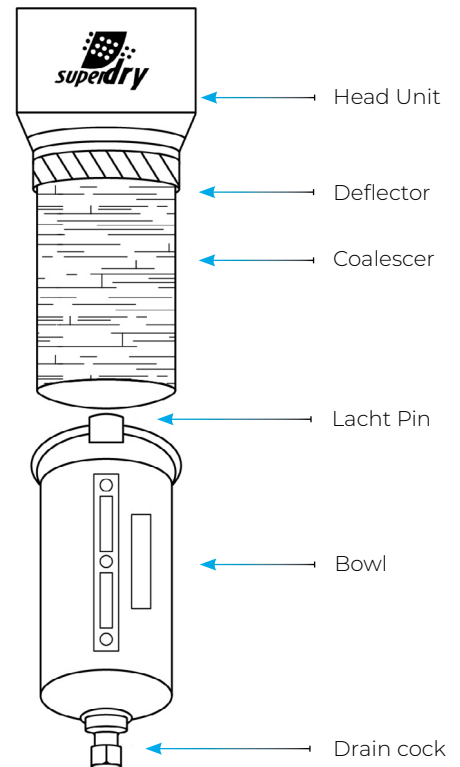

REPLACEMENT KIT INCLUDES : Coalescer Element x 1