

PRODUCT
CATALOG

www.super-dry.com



Table of Contents

 D SERIES Desiccant Air Dryers.....	PAGE 03
 ATD SERIES In-Line Dryers.....	PAGE 08
 FSD SERIES Water Separators.....	PAGE 09
 SAF SERIES Compressed Air Filters.....	PAGE 10
 TD SERIES Automatic Timer Drains.....	PAGE 11
 HGT SERIES Humidity Gauge.....	PAGE 12

D Series

Compressed Air Dryers



- UP TO 300 SCFM
- POINT OF USE DRYERS
- SUPPLEMENT TO A CENTRAL SYSTEM
- ZERO AIR LOSS

LIFE EXPECTANCY
25
YEARS

SUPER-DRY
10
YEAR WARRANTY

Applications

- | Sand Blasting | Paint Spraying | Dust Collectors | Foam Spray |
- | Air Welders | Plasma Cutting | Air Tools | Packing Equipment |

D Series

How It Works



Super-Dry Compressed Air Dryers contains two highly efficient polypropylene coalescer elements at inlet & outlet ports to absorb oil and all solid air particles. Also included, one desiccant bag specifically designed to absorb water vapors and humidity from your compressed air system.

Housings for Flows up to 300 SCFM

- » Heavy duty aluminum casting for high durability and corrosion resistance
- » Powder coated exterior for added durability
- » Special V-band stainless steel clamps permit easy removal of covers for cartridge replacement
- » Optimized air flow through housing minimizes pressure drop
- » Wall mounting brackets included
- » 3 stages in one unit: separation, filtration and drying




Enhanced Performance

- » Easy replaceable self-contained desiccant cartridges
- » High efficiency polypropylene coalescent elements
- » Optimum filter efficiency even at low air flows
- » 10 year warranty
- » Life expectancy: 25 years
- » Pressure dew point: - 40° F*
- » Max. working pressure: 150 PSIG

*The Super-Dry D Series is a non-regenerative point-of-use air dryer. It will not provide a stable dew point for continuous operations. It is not a replacement for a twin tower air dryer.

D Series

Typical Configurations

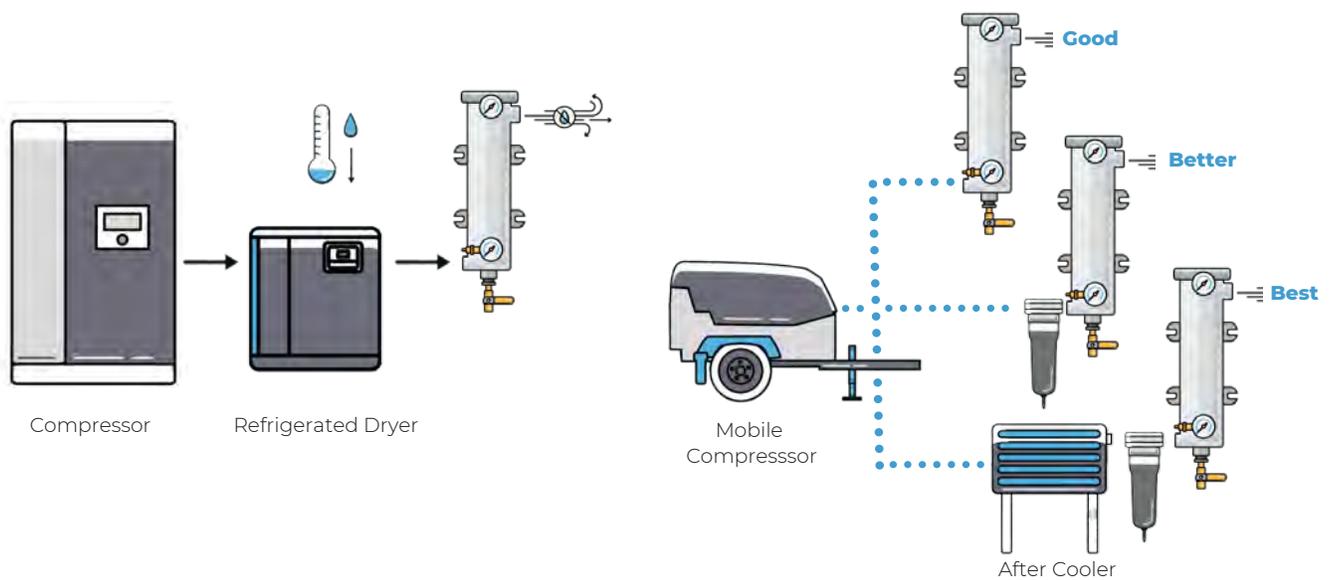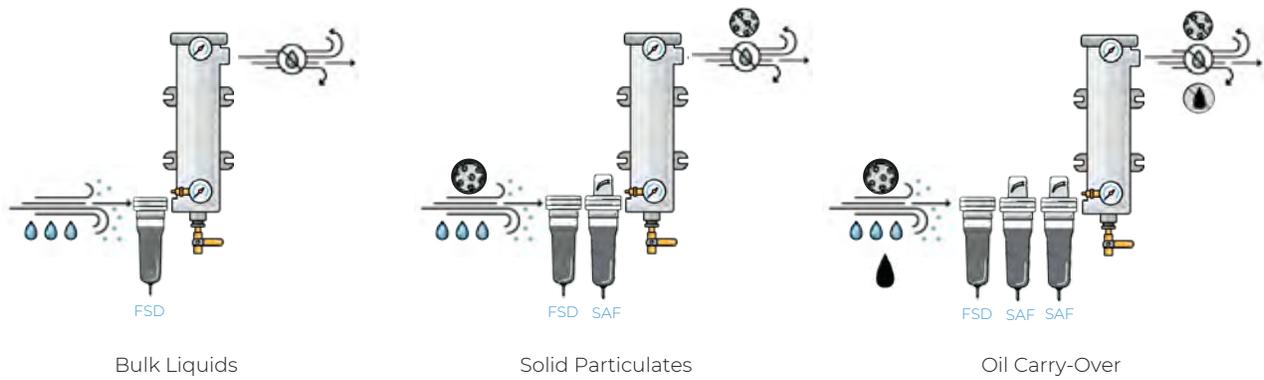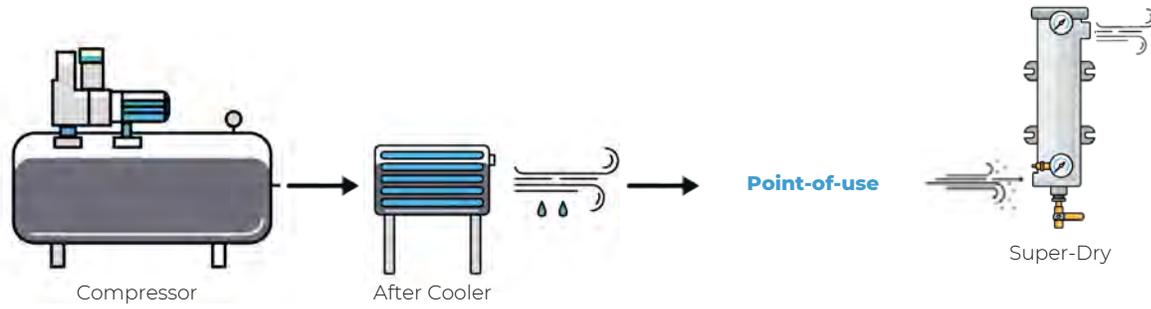

D Series

Premium Options

1 Temperature and Moisture Indicator

- » Indicates optimum cartridge replacement based on % relative humidity

2 Automatic Timer Drain

- » Efficient drainage of condensate
- » Extends the cartridge life of the dryer

3 Water Separator

- » Pre-Filtration of D series Air Dryer



D Series

Specifications




D-1

D-2

D-3

D-4

D4-CRN

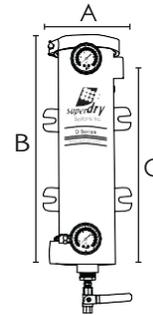

Specifications and ordering information:

Housing	Air flow 100 psig scfm	Inlet/ Outlet NPT in	Dimensions (in)			Replacement kit	Weight (lbs)
			A	B	C		
D-1	70	1	6	19	17 ½	ED-1	20
D-2	150	1 ½	9	20	18	ED-2	40
D-3	200	2	9	33	30	ED-3	75
D-4	300	3	11	33	29 ½	ED-4	100
D4-CRN	300	3	12	35	29 ½	ED-4 -CRN	125

Maximum inlet temperature : 100°F (38°C) Maximum inlet pressure : 150 psig

ATD Series In-Line Dryers



XL MODEL

- EXTENDS THE LIFE OF YOUR AIR-OPERATED EQUIPMENT
- PREVENTS AIR TOOLS FROM FREEZING WHEN WORKING IN A COLD ENVIRONMENT
- REDUCES AIR TOOLS MAINTENANCE COSTS
- ELIMINATE PRODUCTION DOWN TIME



SILICA ELEMENT (XL)




EATD



ATD-FX

Description

Water vapor in the compressed air lines is the leading cause of paint imperfections and damages to pneumatic tools. Typical compressed air is saturated with 100% relative humidity. That means the compressed air is carrying a lot of moisture vapor when it goes into your paint gun or other air tools.

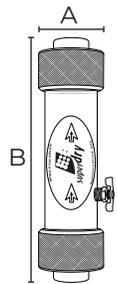

Specifications and ordering information:

Housing	Air flow 100 psig scfm	Inlet/ Outlet NPT in	Dimensions (in)		Replacement kit	Fixing Clip	Weight (lbs)
			A	B			
ATD- 1/4	22	¼	2 ⅝	10 ⅛	EATD	ADT-FX	2.5
ATD- 1/2	44	½	3 ⅝	10 ⅛	EATD	ADT-FX	2.5
ATD- 1/2-CL	44	½	3 ⅝	10 ¾	EATD-CL	ADT-FX	4.2
ATD- 1/4-XL	25	¼	3 ⅝	14	EATD-XL	included	6

FSD Series

Water Separators



- UP TO 515 SCFM
- HEAVY DUTY HOUSING FOR HIGH DURABILITY
- ZERO AIR LOSS FLOAT DRAIN INCLUDED
- EXCELLENT LIQUID REMOVAL EFFICIENCIES AT ALL FLOW CONDITIONS



AUTO DRAIN OPTION




DEFLECTOR

Description

Super-Dry Water Separators have been designed for the efficient removal of bulk liquid contamination from compressed air.

Specifications and ordering information:

Housing	Air flow 100 psig scfm	Inlet/ Outlet NPT in	Dimensions (in)			Weight (lbs)
			A	B	C	
FSD- 45-W	45	½	3.75	8	6.75	2
FSD- 85-W	100	¾	3.75	10.5	9.5	2.2
FSD- 185-W	180	1	5	12	10.25	5
FSD- 375-W	370	1 ½	5	15	13.5	6
FSD- 515-W	515	2	6.75	20	18	14.5

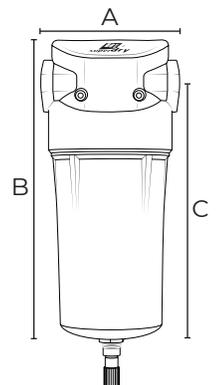

Maximum inlet temperature: 176°F (80°C) Maximum inlet pressure: 232 psig

SAF Series

Compressed Air Filters



-  GENERAL PURPOSE
-  HIGH EFFICIENCY
-  ACTIVATED CARBON



GRADE "X"
- PARTICULATE



GRADE "Y"
- OIL FREE




GRADE "Z"
- ODOR & TASTE

- » Solid Particles: 1.0 micron
- » Pressure Drop: 0.44 psi
- » Oil Carry-Over: 0.5 ppm
- » Solid Particles: 0.01 micron
- » Pressure Drop: 1.74 psi
- » Oil Carry-Over: 0.01 ppm
- » Solid Particles: n.a.
- » Pressure Drop: 1.31 psi
- » Oil Carry-Over: 0.003 ppm

Description

Super-Dry SAF Series filters effectively removes up to 99% of contaminants present in the compressed air. Clean, quality compressed air maximizes air-tool service life, ensures that pneumatic machinery and control systems operate at the peak of their performance and keeps pipes & valves free from contaminants.

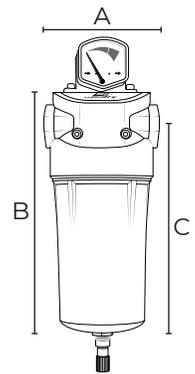

Specifications and ordering information:

Housing	Air flow 100 psig scfm	Inlet/ Outlet NPT (in)	Dimensions (in)			Element (Grade)	Weight (lbs)
			A	B	C		
SAF-45	45	½	3.75	8	6.75	E-45 (X/Y/Z)	2
SAF-85	100	¾	3.75	10.5	9.5	E-85 (X/Y/Z)	2.2
SAF-185	180	1	5	12	10.25	E-185 (X/Y/Z)	5
SAF-375	370	1 ½	5	15	13.5	E-375 (X/Y/Z)	6
SAF-515	515	2	6.75	20	18	E-515 (X/Y/Z)	14.5

Maximum inlet temperature: 176°F (80°C) Maximum inlet pressure: 232 psig

TD Series Timer Drain



-  LOW COST
-  RELIABLE
-  HIGH PERFORMANCE



VARIOUS VOLTAGE AVAILABLE

Description

The TD timer controlled condensate drain is a combination of a solenoid valve, a ball valve strainer and an electronic timer designed to automatically remove condensate from compressors, compressed air dryers and receiver tanks.

Specifications and ordering information:

Model	Voltage	Inlet/Outlet NPT in	Interval Time minutes	Discharge Time seconds	Weight (lbs)
TD- 1/4	110	1/4-1/2 (dual)	0.5 - 45	0.5 - 10	2
TD- 1/4 12 VDC	12	1/4	0.5 - 45	0.5 - 10	2
TD- 1/4 220 V	220	1/4	0.5 - 45	0.5 - 10	2

HGT Series

Moisture Indicator

-  EASY TO INSTALL
-  LOW COST
-  VISUAL MAINTENANCE



GAUGE SNUBBER

Description

The HGT Series Humidity Gauge enables you to determine the level of cartridge saturation inside a D Series Compressed Air Dryer. The reading of moisture establishes the optimum moment for maintenance.

Specifications and ordering information:

Model	NPT in	Relative Humidity %	Temperature °F	Weight (lbs)
HGT-1/4	1/4	10 - 80	20 - 100	3

*This product will not provide the accuracy of a dew point monitor. The brass gauge snubber must be installed to prevent damage to the dial. Excessive **diester oil** carry-over may damage the lexan glass*

A background image of a water splash, showing a large droplet falling and creating concentric ripples on a surface. The image is in a light, monochromatic color scheme.

CONTACT INFO

Head Office

2285 ave Francis-Hughes, #315
Laval, Qc H7S 1N5
Canada

Mailing Address

P.O. Box 1641 St-Martin
Laval, QC H7V 3P8
Canada

1-888-828-1122
www.super-dry.com

